

Engine	Cummins QSB6.7
Max Gross Pow	119 kW (160 hp) @ 2,200 rpm
Max Net Power	108 kW (145 hp) @ 2,200 rpm
Operating Weight	14,200 kg
Standard Bucket Size	2.5 m <sup>3</sup>
Maximum Breakout Force	136 kN
Standard Dump Clearance	2,892 mm

# 848H

WHEEL LOADER



TOUGH WORLD. TOUGH EQUIPMENT.

# 848H SPECIFICATIONS >>>

## ENGINE

Emission Regulation	Tier 3 / Stage IIIA
Make	Cummins
Max Gross Power	119 kW (160 hp) @ 2,200 rpm
Max Net Power	108 kW (145 hp) @ 2,200 rpm
Peak Torque	732 N · m @ 1,400 rpm
Displacement	6.7 L
Number of Cylinders	6
Aspiration	Turbocharged & air-to-air inter-cooled

## TRANSMISSION

Transmission Type	Countershaft, power shift
Torque Converter	Single-stage, three-element
Maximum Travel Speed, Fwd	39 km/h
Maximum Travel Speed, Rev	24.2 km/h
Number of Speeds, Fwd	4
Number of Speeds, Rev	3

## AXLES

Differential Front Type	Limited slip differential
Differential Rear Type	Limited slip differential
Axle Oscillation	±12°

## STEERING


Steering Configuration	Articulated
Steering Relief Pressure	18 Mpa

## BRAKES

Service Brake Type	Wet discs Brake
Service Brake Actuation	Hydraulic
Parking Brake Type	Manual electronic control
Parking Brake Actuation	Hydraulic

## HYDRAULIC SYSTEM

Main Pump Type	Piston
Main Relief Pressure	21 Mpa
Raise	4.8 sec
Dump Time	1.1 sec
Float Down Time	3.0 sec
Fastest Total Cycle Time	8.9 sec

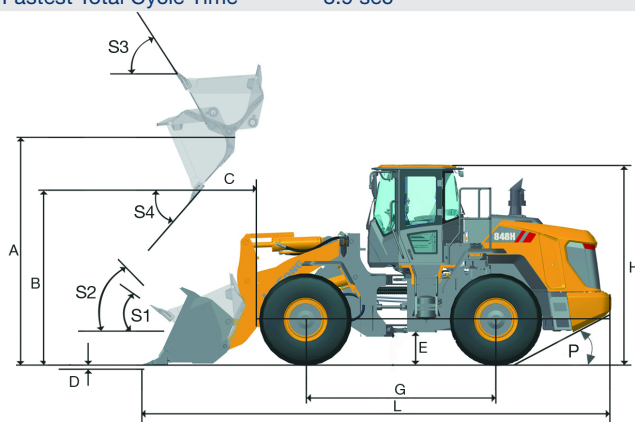

## LOADER ARM PERFORMANCE with Standard Bucket 2.5 m³

Tipping Load - Straight according to ISO 14397-1:2007	10,200 kg
Tipping Load - Full Turn according to ISO 14397-1:2007	9,600 kg
Bucket Breakout Force	136 kN
A Maximum Hinge Pin Height	3,937 mm
B Dump Clearance at Full Height Discharge	2,892 mm
C Dump Reach at Full Height Discharge	989 mm
D Maximum Digging Depth, Bucket Level	70 mm
S <sub>1</sub> Bucket Rollback at Ground Level	43°
S <sub>2</sub> Bucket Rollback at Carry	48°
S <sub>3</sub> Bucket Rollback at Maximum Height	63°
S <sub>4</sub> Maximum Dump Angle at Full Height	45°

## BUCKET PERFORMANCE

Reference Bucket	2.3-4.0 m³
------------------	------------

## DIMENSIONS

E Ground Clearance	366 mm
G Wheelbase	3,050 mm
H Cab Height	3,310 mm
J Wheel Tread	2,050 mm
K Width Over Tires	2,548 mm
L Length with Bucket Down	7,815 mm
M Turn Angle, Either Side	40°
P Rear Angle of Departure	28°
R <sub>1</sub> Turning Radius, Bucket Carry	6,200 mm
R <sub>2</sub> Turning Radius, Outside of Tire	5,460 mm

## TIRES


Tire Size	20.5-25PR16
-----------	-------------

## OPERATING WEIGHTS

Operating Weight	14,200 kg
------------------	-----------

## SERVICE CAPACITY

Fuel Tank	240 L
Engine Oil	15 L
Cooling System	33 L
Hydraulic Reservoir	180 L
Transmission and Torque Converter	40 L
Axle, Front	36 L
Axle, Rear	42 L

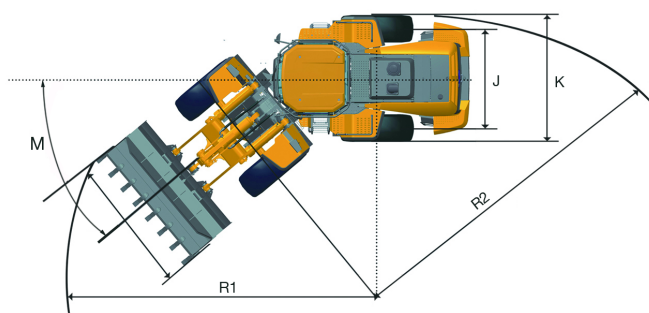

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

02/2018 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.